



UM3031

Bench

Barcino



Controlled
logging



Black forje
casting




BARCINO Bench , overall dimensions (length x height x depth) 1800x785x700 mm, manufactured with ductile iron legs (treated with the Ferrus triple-layer protective process for iron, guaranteeing optimal corrosion resistance). Finished with epoxy primer and black wrought iron polyester powder coating. Tropical hardwood planks (treated with Lignus triple-layer coating, a fungicidal, insecticidal, and water-repellent protective agent). Stainless steel screws. Prepared for anchoring with M10 expansion bolts depending on the surface and project.

Optional not included: Customizable marking with 74x35 mm aluminum plate.

Ductile Iron treated with FERRUS: iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, involving an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint. Forged black colour

Hardwood treated with LIGNUS: Wood from responsible forestry. Density greater than 930kg/m³, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.

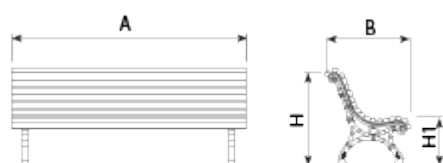

Ref.	A	B	H	H1
UM3031	1800	700	785	440
UM305	2000	700	785	440
UM305S	540	700	785	440

Barcino
UM305S



