


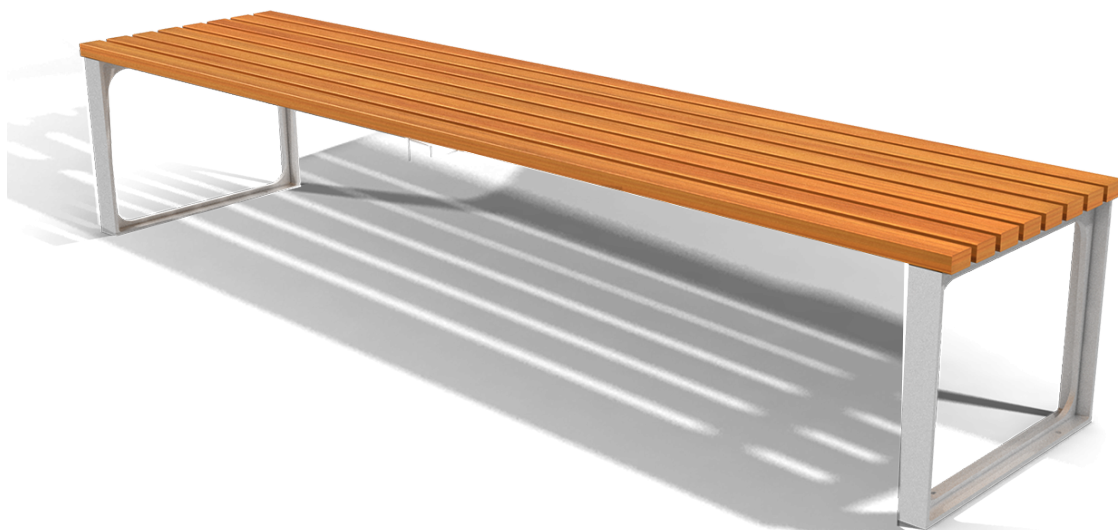

UM397BE

Bench

Lemman

By Compagnies Desrues © ® BENITO



Grey
Casting



Inclusive
Product





Hard
wood



Stool made with ductile iron legs, with Ferrus treatment, an iron protection process that guarantees optimal corrosion resistance.

Ductile Iron treated with FERRUS: iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, involving an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint. Forged black colour

Hardwood treated with LIGNUS: Wood from responsible forestry. Density greater than 930kg/m³, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.



Ref.	A	B	H	H1
UM397E	1965	600	830	430
UM397BE	1965	545	460	-
UM397SE	565	600	830	430

Lemman
UM397E



Lemman
UM397SE



+49 (0) 521 450 131-2 | mb@bas-mobilier.de

